

American Security



Gun Safe Catalog 2014

Gun Safe Lifetime Warranty

IF YOU ARE THE ORIGINAL OWNER OF AN AMSEC GUN SAFE THAT SUFFERS DAMAGE DUE TO THEFT OR FIRE, PROVIDE US WITH A PROPERLY FILED POLICE REPORT, WITHIN 30 DAYS. WITH ABSOLUTELY NO COST TO YOU, WHICH MEANS: FREE PARTS, FREE LABOR AND FREE FREIGHT; WE WILL EITHER REPAIR OR REPLACE (OUR OPTION) WITH A CURRENT PRODUCTION MODEL OF COMPARABLE VALUE. FOR ADDITIONAL ASSISTANCE, PLEASE CONTACT YOUR LOCAL DEALER. WE WILL BE STANDING BY, READY TO TAKE IMMEDIATE ACTION TO GET YOUR VALUABLES QUICKLY SECURED BACK IN A QUALITY BUILT AMSEC SAFE.

No Cost - Break-In Warranty

IF YOUR AMSEC GUN SAFE IS FORCIBLY ENTERED, WE WILL REPLACE OR REPAIR IT, FREE OF CHARGE.

No Cost - Attempted Break-In Warranty

IF YOUR AMSEC GUN SAFE HAS BEEN SUBJECT TO A DRILL, PUNCH OR PRY ATTACK AND HAS PERFORMED SUCCESSFULLY BY KEEPING THE INTRUDERS OUT, IT WILL BE REPAIRED OR REPLACED FREE OF CHARGE.

No Cost - Fire Warranty

IF YOUR AMSEC GUN SAFE HAS BEEN SUBJECT TO A HOME FIRE, IT WILL BE REPAIRED OR REPLACED FREE OF CHARGE.

AMERICAN SECURITY'S WARRANTY COMMITMENT TO YOU: WE WILL FIX THE SAFE IN YOUR HOME IF AT ALL POSSIBLE, WE WILL PAY FOR THE SAFE TECHNICIAN TO OPEN THE SAFE, WE WILL PAY FOR THE SAFE TECHNICIAN TO REPAIR THE SAFE AND IF A REPAIR IS NOT POSSIBLE WITHIN THE HOME, WE WILL PAY FOR THE FREIGHT BACK TO THE FACTORY. EFFECTIVE ON GUN SAFE PURCHASES STARTING 01/01/2006

We Stand Behind Our Craftsmanship with a "No Cost" Lifetime Warranty Against Theft & Fire

American Security Products Co. is highly acclaimed for offering the industry's best fire protection. We manufacture the industry's broadest gamut of fire-rated products ranging from Underwriters Laboratories (U.L.) Listed 1 and 2 hour fire safes to our 30, 45, 60, 90 and 120 minute fire protected gun safes.



Actual AMSEC BF® Gun Safe after a fire.

This satisfied AMSEC gun safe owner was relieved to find that his extensive coin and stamp collection was unharmed.

Contents

HS Series

High Security RF & RFX.....3

BF® Series

Burglary/Fire 4

SF Series

60 Minute Fire 6

FV Series

45 Minute Fire 8

TF Series

30 Minute Fire 10

Defense Vault..... 11

Barrett Gun Safes 12

AM Series 12

Vault Door 13

Security

Products.....14

Handgun Safes..... 15

Stor-it Options

Cabinets and PDO16

Electronic Locks &

Other Options..... 17

Features

At A Glance18

Fire Protection Level Chart

Each AMSEC safe is designed to maintain an interior temperature of less than 350°F. Paper products will char at approximately 450°F.

Series	Fire Label	Outside Temp	Time Period	Inside Temp Less Than
RFX Series	Mercury 120	1850°F	120 min.	350°F
RF6528	Mercury 120	1850°F	120 min.	350°F
BF® Series	ETL 120	1200°F	120 min.	350°F
Barrett® BFB Series	ETL 120	1200°F	120 min.	350°F
Barrett® SFB Series	Mercury 60	1200°F	60 min.	350°F
SF Series	Mercury 60	1200°F	60 min.	350°F
FV Series	Mercury 45	1200°F	45 min.	350°F
TF Series	Mercury 30	1200°F	30 min.	350°F

AMSEC gun safes that proudly display the UL Residential Security Container (RSC) Burglary Classification demonstrated the ability to withstand rigorous prying, drilling, punching, hammering, chiseling and tampering attacks performed by today's most experienced UL expert technicians.



All of our HS, BF, SF, FV and TF Series safes come with a Palusol Intumescent Door Seal. When the intumescent seal is exposed to high temperature (above 250°F), it expands to as much as 8 times its original thickness. This provides a strong positive seal between the door and body, preventing heat influx.



HS Series - High Security RFX & RF Models




RF6528


Shown in Onyx with Brass Hardware, Standard Pull Handle and Optional Electronic Lock



Shown in Textured Black with Chrome Hardware and Optional ESL10XL Electronic Lock



RFX703620 Interior



RFX582820 Interior

The RF6528 Features:

The only U.L. Listed TL-30 burglary and fire resistant gun safe on the market.

Overall thickness of door is 6" and is constructed with a 3" defense barrier of outer and inner steel plates creating a single structure enclosing a unique, high density fire and burglary resistant composite material.

The RF6528 formed body has a total protective thickness of 3½" enclosing a high density fire resistant composite material with nuggets and steel fibers.

2 Stage Dual fire seals with silicone seal on door jamb and expandable Palusol™ seal on door.

A reinforced drill resistant door frame protects the door and each individual bolt chamber from severe side attacks.

Group 2M Lock is protected by a proprietary patented hard plate, dual external relocker and one internal relocker.

A proprietary inner barrier protects against peeling attacks.

NEW RFX Series Features:

The new Amvaultx6 U.L. Listed TL-30x6, six-sided high-security gun safes are made in the United States using the latest testing procedures set forth by Underwriters Laboratories.


The new revolutionary Amvaultx6 is constructed with a 3" defense barrier of inner and outer steel plates enclosing a unique interlocking heavy duty steel barrier, 12,000 PSI high-strength concrete and a high-density high-strength ceramic matrix.

The high density insulating materials incorporated in the door and body also insure two hours of certified fire protection. The superior design and craftsmanship make the new Amvaultx6 impervious to burglary attacks attempted by the most sophisticated equipment utilized today and the vaults contents against intense fires.

HS Standard All-in-One Interiors

Come with 2 coverplates and 4 side shelves to allow storage on all sides of the safe.

Model	Outside Dim H x W x D	Interior Capacity	Weight
RFX703620	76" x 42" x 29¼"	12-14-24-26-38 + 2 Gun 58 + 2 Gun	4,578
RFX582820	64" x 34" x 29¼"	12-18-30 Gun	3,418
RF6528	72" x 35" x 29.5"	12-18-30 Gun	3,455



RF6528




RFX Safes




High-Gloss Color Options



Textured Color Options



Hardware Color Options





BF6636
Shown above in Charcoal Metallic with Black Nickel Hardware, standard pull-handle, and Optional ESL10XL Electronic Lock

BF® Series – Burglary / Fire

The Most Unique Gun Safe In the Industry

The BF Series Features:

½" steel plate door combined with 1" DryLight insulation. (BF7250 and BF6024 have 3/8" steel plate.)

2" total wall thickness on all sides featuring our poured DryLight insulation and two layers of steel for exceptional fire and security protection. Total combined steel thickness of walls is 7ga.

U.L. Residential Security Container (RSC) Burglary Classification.

11 massive 1½" chrome-plated bolts. Bolt detent system holds bolts in open position.

ETL Verified Fire protection of 1200°F for 120 minutes. Designed to maintain an interior temperature of less than 350°F.

Ultra smooth cam driven locking mechanism with increased handle rotation.

Commercial grade, adjustable ball bearing hinges.

Available with Left Swing or Right Swing door

2 Stage Dual fire seals with silicone seal on door jamb and expandable Palusol™ seal on door.

U.L. Listed Group II Lock with massive hard plate and two relocking devices.

Spy-proof, key-locking dial with decorative five-spoke handle and a convenient pull handle in brass, chrome or black nickel.

BF6024 offers a chrome or brass "L" handle and does not come with a pull handle.

Bold zinc die-cast polished logos in brass, chrome or black nickel. (Black nickel not available on BF6024).

Optional electronic locks are available.

Unique mirrored back wall for added interior visibility.

Premium Door Organizer (PDO) maximizes storage space and offers quick access to commonly used items. See Page 16 for more details.

Standard built in internal AC power port with removable external power cord.


4 pre-cut anchor holes.

E-Z Slant-Out Interior for easy access to your long guns. Interior features rich pin-dot fabric and adjustable interior shelving.



New Intertek laboratory testing confirms that AMSEC's BF® Gun Safes have superior fire protection for TWO HOURS at 1,200°F.

Within 8 minutes, the furnace temperature was raised to 1200° F, and that temperature was maintained for the remainder of the two-hour test. This method is consistent with the UL-72 fire test curve. Typical house fires only reach temperatures of 1100° F. A safe is considered to have failed this test if temperatures exceed 350°F anywhere in the safe. Our safe passed the test as internal temperatures never exceeded 325° F during the two hours of testing. Paper typically starts to ignite at 450° F.

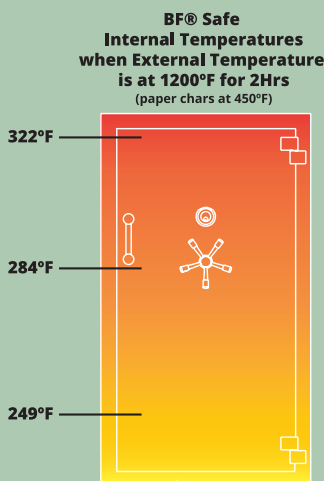


AMSEC's BF Gun Safes use a proprietary fill material called DryLight, which offers exceptional fire protection without adding excess weight. This superior fire protection was confirmed at Intertek, the industry's leading independent laboratory for gun safe fire testing. When analyzing the fire performance of competitive safes, be sure to weigh reports from independent laboratories against unverified factory testing.

During fire testing, Intertek kept our BF Gun Safes in their test oven for two hours.


High-Gloss Color Options




Textured Color Options

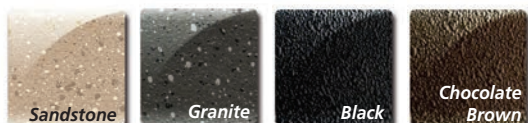

Two-Tone Color Options



Hardware Color Options



N/A on BF6024

BF® Series - Burglary / Fire



NEW!

BF6024

Shown in Textured Black




BF7240

Shown in Burgundy Metallic with optional Cabinets and Light Kit




E-Z Slant-Out Interior


BF® Series Interior Configurations:




BF7250 Standard Gun Interior




BF7250 Optional 73 Gun Interior

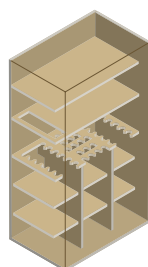


BF7240 Standard Gun Interior

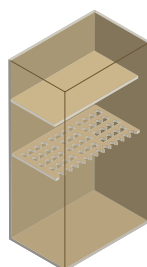


BF7240 Optional 58 Gun Interior




BF6636 Standard Gun Interior



BF6030 Standard Gun Interior




BF6032 Standard Gun Interior



BF6024 Standard Gun Interior




The BF Series features an integrated internal power outlet!



LOCKING BOLTS


11 1/2"



WALLS

2"

Poured DryLight Fill



1/2" PLATE DOOR

4 3/4"

BF7250 & BF6024 are 3/8" Plate



120 MINUTES

Fire Protection



SECURITY

UL LISTED

RESIDENTIAL SECURITY CONTAINER 81Y6



LIFETIME WARRANTY

Against Theft & Fire

No Labor Charge No Parts Charge No Freight Charge



BF® Standard All-in-One Interiors

Come with 2 coverplates and 4 side shelves to allow storage on all sides of the safe. Models BF7250 and BF7240 come with 3 coverplates and 6 side shelves.

All BF® Series Safes Feature DryLight Insulation

American Security Product's **DryLight** is an advanced poured concrete insulation material that eliminates the use of gypsum board and provides a dry and seamless barrier to protect valuables against intense fires and burglary attacks.



Model	Outside Dim H x W x D	Interior Capacity	Weight
BF7250	71.25" x 50" x 28"	12-23-24-35-47 + 2 Gun 73 + 2 Gun	1,789
BF7240	71.25" x 40" x 26"	12-14-24-26-38 + 2 Gun 58 + 2 Gun	1,585
BF6636	65.25" x 36" x 26"	12-19-31 + 2 Gun	1,319
BF6030	59.25" x 30" x 26"	11-14-25 + 2 Gun	1036
BF6032	59.25" x 30" x 21"	7-11-18 + 2 Gun	913
BF6024	59.25" x 24" x 21"	8-8-16 Gun + 1 Gun	720



SF6030

Shown above in
Onyx with Chrome Hardware

Rich Velour Interior

SF Series – 60-Minute Fire

Quality Packed, Affordably Priced

The SF Series Features:

¼" Steel Plate door with 3 layers of fire insulating material.

Fire protection of 1200°F for 60 minutes. Designed to maintain an interior temperature of less than 350°F.

U.L. Residential Security Container (RSC) Burglary Classification.

2 Stage Dual fire seals with silicone seal on door jamb and expandable Palusol™ seal on door.

Body constructed of 12-gauge solid steel plate with a fire insulating material.

U.L. Listed Group II Lock with spy-proof, key-locking dial, massive hard plate and two relocking devices.

Ultra smooth cam driven locking mechanism with increased handle rotation.

Optional electronic lock available.

3-point handle in brass, chrome or black nickel and bold zinc die-cast polished logos in brass, chrome or black nickel.

4-way boltwork with 9 active 1½" chrome-plated bolts and 5 deadbolts for a total of 14 bolts.

Adjustable ball bearing hinges.

All-velour interior including back-cover and firewalls.

Premium Door Organizer (PDO) maximizes storage space and offers quick access to commonly used items. See Page 16 for more details.

Four (4) pre-cut anchor holes with mounting hardware included and one (1) pre-cut electrical access hole.

Available in several gloss and textured finishes.

LOCKING BOLTS

14 1½"

WALLS

12 ga.


¼" PLATE DOOR

4¼"

High-Gloss Color Options



Textured Color Options




Two-Tone Color Options



SF Standard All-in-One Interiors

Come with 2 coverplates and 4 side shelves to allow storage on all sides of the safe.

Hardware Color Options




SF Series - 60 Minute Fire




SF6036

Shown in Platinum



SF6030

*Shown in Macadamia Metallic
with Optional Stor-it Cabinets
and Light Kit*




SF6032

*Shown in Sandstone
with Brass Hardware*




*Premium Door Organizer
for SF6030 and SF6032*



SF5924

*Shown in Granite with
Chrome Hardware.*



Model	Outside Dim H x W x D	Interior Capacity	Weight
SF6036	59" x 36" x 26"	17-17-34 + 2 Gun	850
SF6030	59" x 30" x 26"	14-14-28 + 2 Gun	706
SF6032	59" x 30" x 21"	9-9-18 + 2 Gun	648
SF5924	59" x 24" x 18"	8-8-16 Gun + 1 Gun	514




FV6032E5

FV Series Safes feature the ESL5 Illuminated Electronic Lock.



Color & Hardware



NOTE: FV Series Safes are only available in Textured Black with Chrome hardware.

FV Series – 45-Minute Fire

An Unbeatable Value

All FV Series Safes Feature:

$\frac{3}{16}$ " Steel Plate door with 2 layers of fire insulating material.

Fire protection of 1200°F for 45 minutes. Designed to maintain an interior temperature of less than 350°F.

2 Stage Dual fire seals with silicone seal on door jamb and expandable Palusol™ seal on door.

Body constructed of 12-gauge (FV7240E5 - 11ga) solid steel plate with a fire insulating material.

Every FV Series gun safe comes standard with AMSEC's ESL5 Electronic Lock with illuminated keypad.

Optional Group II combination lock available.

Drill resistant hardplate with external spring-loaded re-locking device.

New ultra smooth cam driven locking mechanism with increased handle rotation.

3-point chrome tri-spoke handle featuring slip clutch feature for additional security to prevent excessive torque to retract bolts during attempted break in. and bold zinc die-cast polished chrome logo.

4-way boltwork with 9 massive $1\frac{1}{4}$ " chrome-plated locking bolts, and 5 deadbolts for a total of 14 bolts.

Adjustable ball bearing hinges.

Textured Black exterior and plush gray fabric interior including back-cover and firewalls.

Premium Door Organizer (PDO) maximizes storage space and offers quick access to commonly used items. See page 16 for more details.


Four (4) pre-cut anchor holes with mounting hardware included and one (1) pre-cut electrical access hole.

TOTAL BOLTS

14 $1\frac{1}{4}$ "


WALLS

12 ga.



$\frac{3}{16}$ " PLATE DOOR

$3\frac{5}{8}$ "




(FV7240E5 - 11ga)

FV Series – 45-Minute Fire




FV7240E5

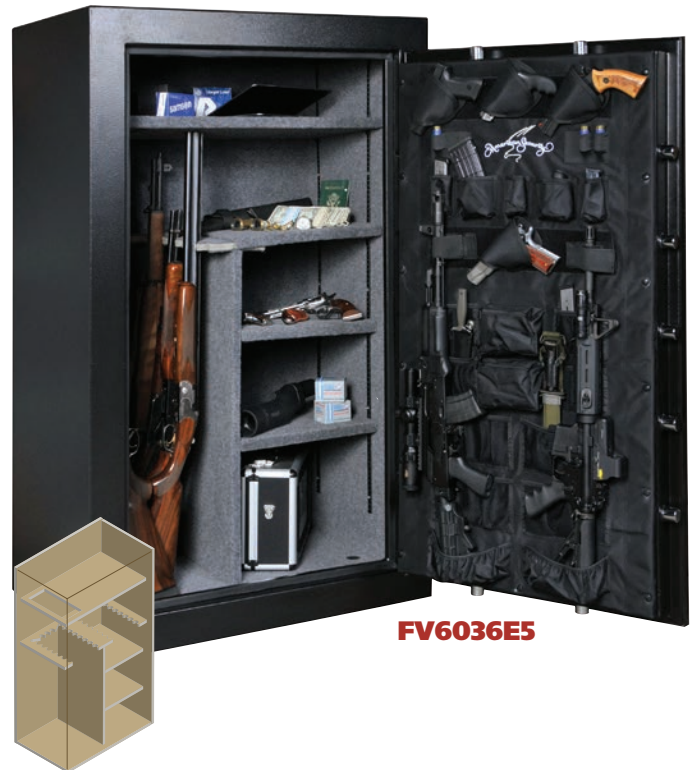

FV6036E5



FV6030E5

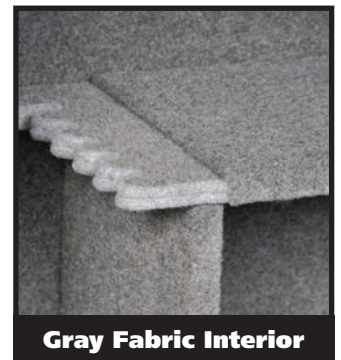

Gray Fabric Interior

 All Interiors Come with 1 coverplate to allow shelf storage on either side of the safe



Model	Outside Dim H x W x D	Interior Capacity	Weight
FV7240E5	72" x 40" x 26"	15-15-15-30-45 +2 Gun	954
FV6036E5	59" x 36" x 26"	17-17-34 +2 Gun	724
FV6030E5	59" x 30" x 26"	15-15-30 + 2 Gun	608
FV6032E5	59" x 30" x 21"	11-11-22 + 2 Gun	578

TF5924E5 and TF5517



TF5924E5 Features:

3/16" Steel Plate door with 2 layers of fire insulating material.

Fire protection of 1200°F for 30 minutes. Designed to maintain an interior temperature of less than 350°F.

2 Stage Dual fire seals with silicone seal on door jamb and expandable Palusol™ seal on door.

Body constructed of 14-gauge solid steel plate with a fire insulating material.

Standard lock is AMSEC's ESL5 Electronic Lock with illuminated keypad.

Optional Group II combination lock available.

Drill resistant hardplate with external spring-loaded re-locking device.

3-point chrome tri-spoke handle featuring slip clutch feature for additional security to prevent excessive torque to retract bolts during attempted break in.

Bold zinc die-cast polished chrome logo.


4-way boltwork with 9 massive 1 1/4" chrome-plated locking bolts, and 5 deadbolts for a total of 14 bolts.

Adjustable ball bearing hinges.

Premium Door Organizer (PDO) maximizes storage space and offers quick access to commonly used items.

Textured Black exterior and Mocha fabric interior including back-cover and firewalls.

Four (4) pre-cut anchor holes with mounting hardware included and one (1) pre-cut electrical access hole.



The TF5517E5 & TF5517 Feature:

3/16" Steel Plate door with 2 layers of fire insulating material.

Fire protection of 1200°F for 30 minutes. Designed to maintain an interior temperature of less than 350°F.

2 Stage Dual fire seals with silicone seal on door jamb and expandable Palusol™ seal on door.

Body constructed of 14-gauge solid steel plate with a fire insulating material.

TF5517E5 comes standard with AMSEC's ESL5 Electronic Lock with illuminated keypad, drill resistant hardplate and external spring-loaded re-locking device.

TF5517 comes with a 3-wheel combination lock with spy-proof dial and drill resistant hardplate.

Chrome "L" handle featuring slip clutch feature for additional security to prevent excessive torque to retract bolts during attempted break in.

Bold zinc die-cast polished chrome logo.

4-way boltwork with 5 active 1" chrome-plated bolts and 3 deadbolts for a total of 8 bolts.

Premium Door Organizer (PDO) maximizes storage space and offers quick access to commonly used items.


Textured Black exterior and Mocha fabric interior including back-cover and firewalls.

Durable hinges.

Four (4) pre-cut anchor holes with mounting hardware included and one (1) pre-cut electrical access hole.

Warranty: 1 Year Parts and Labor.

TF5924E5



NOTE: TF Series Safes are only available in Textured Black with Chrome hardware.

TF5517E5 / TF5517



Model	Outside Dim H x W x D	Interior Capacity	Weight
TF5924E5	59" x 24" x 18"	8-8-16 Gun + 1 Gun	388
TF5517E5	55.25" x 17.34" x 16"	11 Gun	286
TF5517	55.25" x 17.34" x 16"	11 Gun	286



Defense Vault *Puts Home Security Where You Need it.*

There's no better place to store your home-defense weapon within arm's reach than under your bed in the secure and easily accessible AMSEC Defense Vault!

The High Security electronic lock is easy to use, and in a matter of seconds, the door is open and the weapon is in hand!

The Defense Vault utilizes wasted space and is a great storage solution when space is limited! Larger traditional safes are typically placed in larger rooms, basements or the garage. With the Defense Vault, you will have peace of mind in knowing that you are protected within seconds of a home intrusion.

Whether you currently have a safe or not, the Defense Vault should seriously be considered for any gun owner.

Features AMSEC's ESL5 electronic lock with an illuminated keypad. Bright, backlit keys let you enter your PIN code, even in the dark.

The AMSEC Defense Vault is constructed of 14 ga. steel with a unique 5-point slide locking bar and features a foam-padded slide-out gun tray and four (4) pre-cut anchor holes with mounting hardware.



Model	Outside Dimension	Tray Size	Wt. Lbs.	Locking Device	Warranty	U.L. Listing
DV652	6" x 52" x 14"	3 ³ / ₈ " x 43 ¹ / ₄ " x 13"	90	5-Point Slide Locking Bar with ESL5 Electronic Lock	1 Year Parts & Labor	B-Rate

**Features the
ESL5 Illuminated
Electronic Lock**





Series Gun Safes

Barrett Gun Safes offer the same quality features as the BF® Series Gun Safes with standard features like the Barrett Tactical Door Organizer, a specially designed slide-out tactical weapons storage rack (BFB Series) or padded velour base shelf for storing AR guns (SFB Series), the Barrett series of gun safes give you the quality features you want in a gun safe.



BFB Series Safe Specifications

Model	Outside Dim H x W x D	Weight	Interior Capacity	Bolts
BFB7250	71¼ x 50 x 28	1,789	3-6-8-17/9+ 2 Gun	11
BFB7240	71¼ x 40 x 26	1,585	6-3-9-18/9+ 2 Gun	11
BFB6636	65¼ x 36 x 26	1,319	6-3-5-14/9+ 2 Gun	11
BFB6030	59¼ x 30 x 26	1,036	6-8-14-14/6+ 2 Gun	11

SFB Series Safe Specifications

Model	Outside Dim H x W x D	Weight	Interior Capacity	Bolts
SFB6036	59 x 36 x 26	760	17-17-34+ 2 Gun	14
SFB6030	59 x 30 x 26	706	14-14-28+ 2 Gun	14
SFB6032	59 x 30 x 21	648	9-9-18+ 2 Gun	14

For more information on the Barrett Series Gun Safes, visit our website at: www.amsecusa.com/barrett/

AM Series Home Safes



Optional Clip-On
Light Kit Available

AM Series Features:

Mocha fabric interior including back-cover and firewalls.

Deep blue textured finish with bold, elegant American Security logo.

Adjustable ball bearing hinges.

High-strength unitized 12 ga. solid steel body.

Massive 1½" recessed door constructed of a ¼" solid steel plate and a fire insulating material.

ESL5 electronic lock protected by a drill-resistant hard plate and reloading device. (U.L. Listed Group II Combination or Electronic lock available).

Chrome "L" Handle.

3-way boltwork with 5 active 1¼" diameter chrome-plated steel locking bolts (2020 Model has 4 active locking bolts).

Four (4) pre-cut anchor holes with mounting hardware included.

Fire protection of 1200°F for a period of 30 minutes. Designed to maintain an interior temperature of less than 350°F.

Warranty: 1 Year Parts and Labor

Model	Exterior	Door	Body	Bolts	Shelves	Wt.
AM2020E5	20h x 20w x 20d	1 1/8"	12 ga.	6	1	180 lbs.
AM3020E5	30h x 20w x 20d	1 1/8"	12 ga.	8	2	230 lbs.
AM4020E5	40h x 20w x 20d	1 1/8"	12 ga.	8	3	282 lbs.



New Interior Release Handle



Turn your entire room into a security center

Instead of buying three different safes over a lifetime, AMSEC vault doors turn your room into a security center. It is designed for easy installation that retrofits a standard 80" x 30" or 80" x 36" opening. Make your vault room double as a storm shelter with our in-swing vault door. Offering the same features as our standard vault door, the in-swing vault door will insure opening from the inside even if debris has blocked the door.

Standard Features of the Vault Door:

- U.L. Listed Group II Lock with massive hard plate and two relocking devices.
- Spy-proof key-locking dial with matching five-spoke handle, pull handle and bold zinc die-cast logo. Available in polished brass, chrome or black nickel finish.
- 10 massive 1½" chrome-plated bolts. (Note: no deadbolts required on In-Swing door)
- Select from four textured finishes.
- Commercial grade, Vault Door hinges.
- 2 Stage Dual fire seals with silicone seal on door jamb and expandable Paluso™ seal on door.
- New - Adjustable door frame slides together to fit a wall thickness of 4-3¼" to 9-3¼".
- Safety Lock Release: allows you to safely exit the vault room from inside. It also allows you to close and lock the door from the inside when equipped with an electronic lock, turning your vault into a safe room.

Special Features of the VD8030SF / VD8036SF:

- 2" thick door offers a defense barrier constructed of a 1/8" inner and ¼" outer steel plates filled with a fire insulation material that provides a barrier against extreme heat.


Special Features of the VD8030BF / VD8036BF:

- 2" thick door offers a defense barrier constructed of a ½" steel plate door combined with 1" DryLight insulation that provides a barrier against extreme heat.

VD8030SF
Chocolate Brown with
Black Nickel Hardware



Vault Doors

VD8030BF / VD8036BF



Poured
DryLight Fill

VD8030SF / VD8036SF




Triple-Layer
Fire Protection

Color Options



Sandstone



Granite



Black



Chocolate
Brown

Hardware Options



Brass



Chrome



Black Nickel

Model	Description	Wall Opening	Door Opening	Weight (Door Only)	Shipping Weight
VD8030SF	Vault Door	79½" x 29½"	77½" x 24¾"	523	667
VD8030SFIS	In-Swing Vault Door		77" x 19¼"	505	649
VD8036SF	Vault Door	79½" x 35½"	77½" x 31¾"	612	782
VD8036SFIS	In-Swing Vault Door		77" x 26¼"	575	745
VD8030BF	Vault Door	79½" x 29½"	77½" x 24¾"	695	839
VD8030BFIS	In-Swing Vault Door		77" x 19¼"	672	816
VD8036BF	Vault Door	79½" x 35½"	77½" x 31¾"	819	989
VD8036BFIS	In-Swing Vault Door		77" x 26¼"	792	962



Fire Safes

with NEW ESL5/ESL5LP Electronic Lock



FS914E5LP



FS149E5LP



FS1814E5



FS914



FS149

Safe features:

U.L. Listed, 350°F, 1-Hr fire protection.

Units with NEW ESL5LP Electronic lock feature:

- Illuminated Keypad
- Factory Reset Combination for resolving lost combinations without requiring expensive service calls.
- Beep and flash from every keystroke gives maximum feedback to the user.
- Lock can be programmed to silence the beep in stealth mode.
- 15-Minute Penalty Lockout after four incorrect entries protects against manipulation attempts.
- One 9-volt battery can be easily replaced in the keypad housing.

Models FS914E5LP and FS149E5LP come with slide-out drawer, anchor holes and anchor hardware. Models FS1814E5 and FS2215 come with a key-locking drawer, adjustable shelf, anchor holes and anchor hardware.

Mechanical combination units (FS) come with standard mechanical combination lock plus key lock.

Safe Specifications

Model	Interior Dimensions	Exterior Dimensions	Clear Door	Cu. In.	Wt.
FS712E5LP	7 x 11¼ x 8-3/8	11¾ x 16½ x 13¾	7 x 11¼	660	70
FS914E5LP	8-7/16 x 14 x 10½	13½ x 19-1/8 x 15¾	8-7/16 x 14	1,107	96
FS149E5LP	14-1/8 x 8¼ x 10¾	19-1/8 x 13½ x 15-11/16	14-1/8 x 8¼	1,258	96
FS1814E5	18¼ x 13-1/8 x 12-3/8	23-5/8 x 18-7/8 x 18-7/8	18¼ x 13-1/8	2,920	187
FS914	8-3/8 x 14 x 10¾	13½ x 19-1/8 x 15¾	8-3/8 x 14¼	1,189	96
FS149	14-1/8 x 8¼ x 10¾	19-1/8 x 13½ x 15-11/16	14-1/8 x 8¼	1,258	96
FS2215	17¾ x 13-7/8 x 13-3/8	30-3/8 x 19¾ x 19-3/8	17¾ x 13-7/8	2,786	225



EST813



EST916



EST1014



EST2014

Electronic Safes

with DL5000 Electronic Lock

Safe features:

Small burglary resistant safes with state-of-the-art DL5000 digital electronic locking system.

The DL5000 Electronic Lock features:

- Emergency key lock • Low battery indicator
- Power override battery box
- Spy-proof feature to hide combo
- Motion detector with alarm
- Accepts 2 user codes and can show open door records for last 14 entries

Can be bolted to the wall, floor or put inside a safe.

Dual live bolts made of heavy-gauge steel.

Carpeted base.

Safe Specifications

Model	Interior Dimensions	Exterior Dimensions	Clear Door	Cu. In.	Wt.
EST813	7-11/16 x 12-13/16 x 5½	7-7/8 x 13 x 7¾	5-5/8 x 9	498	16
EST916	8-13/16 x 16-11/16 x 12	9 x 16-7/8 x 14-1/8	6¾ x 13	1,765	30
EST1014	9-9/16 x 13-15/16 x 7¾	9¾ x 14-1/8 x 9¾	7-5/8 x 10¼	1,032	22
EST2014	19-9/16 x 13-9/16 x 10	19-3/4 x 13-3/4 x 12-1/4	17-1/8 x 9-1/4	2,602	40

PS1210HD

Heavy Duty Handgun Safe

Safe features:

- High strength 10 ga solid steel body.
- Massive 3/16" gas piston assisted door with two solid steel dead bars
- Welded and concealed continuous hinge
- Reliable fast access Simplex push button mechanical locking device
- Strong, pry-resistant locking bolt
- Locking mechanism protected by steel housing, impervious to punch attacks

- Charcoal gray textured finish with chrome hardware
- Heavy-duty chrome carrying handle
- Protective high density pluck foam-lined interior.
- Four pre-drilled bolt down holes
- Packaged for UPS/FedEx shipments
- Made in the USA



Exterior Dimension	Weight
10.25" x 12.5" x 4.25"	24



PB3 Handgun Safe

Safe features:

- Deep blue textured finish with chrome hardware.
- Heavy-duty chrome handle.
- Strong, pry-resistant chrome locking bolt.
- Interior cushioned with foam lining to protect against scratches.

- Easy to change combination with programmable override code.
- Four (4) AA batteries provides over 5,000 openings with low-battery indicator.
- External auxiliary battery connection.
- Tamper-proof penalty lockout protects against manipulation attempts.
- Pre-punched holes enable the case to be installed directly to most surfaces.

Exterior Dimension	Weight
8h x 12w x 4d	10

ESF1214 Fingerprint Safe

Safe features:

- State-of-the-art fingerprint electronic lock. Up to 100 finger prints can be programmed.
- Motorized bolt work system with 2 chrome-plated solid-steel locking bolts.
- Spring-assisted door auto opens when unlocked.
- New laser-cut arched door design with heavy-duty 7/16" solid steel door and casing.

- 1/8" thick solid steel body
- Attractive textured black finish
- 1 adjustable shelf
- Includes: 1 emergency key-lock with 2 keys and anchor kit
- Warranty: 1 year parts and labor.



Model	Exterior (HxWxD)	Cu. In. Capacity	Weight
ESF1214	11¼ x 14½ x 1215/16	1,692	54 lbs.



Exterior Dimension	Weight
4.5h x 12w x 14d	20

IRC412 Drawer Safe

Safe features:

- Heavy duty steel construction offers excellent burglary protection.
- Convenient motorized locking system, incorporating the latest technology.
- Easy to read, large LED display lets you know the status of the safe.
- Reliable ADA approved keypad.

- 4 to 6 digit combination, standard hotel room configuration (customer sets new combination every time safe is used, quickly and easily), or electronic credit card.
- Lock-out penalty if the combination is entered wrong, the safe will lock up for 5 minutes, frustrating the would-be burglar.
- Emergency key-lock override system with 2 keys.
- Fits in a drawer and only requires 5" clearance
- Spacious interior fits tablets and compact lap top computers.



Stor-It-Cabinets

These elegant, well-appointed 2-drawer and 4-drawer interior chests are the most sophisticated way to store and display your jewelry collection and letter files. These stunning chests are finely crafted in solid-wood maple drawer fronts and maple veneer and finished in a rich honey maple stain. NEW recessed door pulls give these cabinets a more streamlined appearance and makes for an easier fit into a variety of AMSEC safes. All drawers are elegantly lined in a silky, dark red felt and include a variety of Stor-It Jewelry Organizer Inserts.



Two Drawer Cabinet

Top drawer includes a Three Compartment Ring Organizer and a Seven Compartment Jewelry Organizer. Bottom drawer can be used for bulky items or converts to a file drawer.



Four Drawer Cabinet

Top drawer includes a Three Compartment Ring Organizer and a Seven Compartment Jewelry Organizer. Drawer Two Includes a Three Compartment Necklace Organizer. Drawer

Three Includes a Four Compartment Watch Organizer. Drawer Four is left open for easy access of large, bulky items, or stack additional Stor-It Jewelry Organizer Inserts.

Storage Cabinet Specifications

Model	Outside Dimensions (HxWxD)	Weight
2-Drawer	16 ¾ x 16 x 14 ½	28
4-Drawer	16 ¾ x 16 x 14 ½	29

The AMSEC Stor-It-Cabinets are available as an option on the following Gun Safe models:

RF6528, RFX703620, RFX582820, BF7250*, BF7240, BF6636, BF6030, SF6036, SF6030

Cabinets do not fit any 6032, 6024 or 5924 models, the FV Series or the TF Series.

* no kit needed for installation on BF7250 - Cabinets slide right in.

Premium Door Organizer Retrofit Kits

The AMSEC Premium Door Organizer (PDO) maximizes storage space, offers quick access to commonly used items, and are easily installed on any gun safe.

All PDO's include:

- Various see-through pouches and zippered pockets to store valuables.
- Two rows of holders for storage of choke tubes, small flashlights and ammo.
- Two full-width pistol storage systems to accommodate multiple handguns. Comes with four holsters. Additional holsters can be purchased separately.
- A long gun storage system that accommodates two guns. Includes the AMSEC exclusive "no hassle" quick release band.
- PDO Model 28 offers a zippered pocket large enough to store letter size folders.



PDO Model 13

Fits safe doors up to 48.5"H x 19"W.



PDO Model 19

Fits safe doors up to 51.25"H x 25"W. With included extension strap kit, fits safe doors up to 57.75"H x 34"W.



PDO Model 28

Fits safe doors up to 64"H x 34"W. With included extension strap kit, fits safe doors up to 70.5"H x 40"W.

Electronic Lock Options

For quick and easy entry, an electronic lock is the choice to make. Locks are powered by batteries located in the dial and you can change your combination anytime.

AMSEC®

AMSEC's ESL10XL

Available in Brass, Chrome and Black Nickel finish



AMSEC's ESL5

Available in Brass, Chrome and Black Nickel finish



"Lock Duo"

Available as an upgrade or retrofit kit on selected AMSEC safes.



S&G Model 6120

Round Keypad, Brass or Chrome finish



S&G Titan

"EZ" Keypad, Brass, Chrome or Black Nickel finish



LAGARD

LG Basic

Brass or Chrome finish

Other Options



.50 Caliber Handle

Available in Black Nickel.

BF® & SF Gun Safes only. (SF safes come with a three spoke handle)

Jewelry Tray

Tray conveniently fits into every safe.

Burgundy felt lined.

Dimensions: 10 3/8" x 9 3/8" x 2"



Clip-On Battery Operated Light Kit

This compact light fits any safe, yet gives off a super-bright light, letting you see the contents of your safe easily. Battery Operated.

Desiccant


Prevents rust and moisture damage.

Recommended for safes without electrical access.



Pistol Rack

This four-gun rack is ideal for organizing pistols inside your safe.

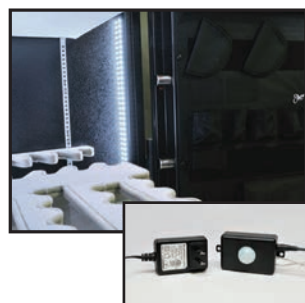

LED Light Kit

AMSEC introduces the new HIWL120 LED AC power light kit with built-in motion sensor. The HIWL120 has two 39" light strips with 120 high-intensity white LED's and a motion sensor that automatically turns itself on when motion is detected and turns itself off 30 seconds after you leave the area.

The new AMSEC HIWL120 LED AC power light kit can be installed on any AMSEC safe, or can be purchased as a retro-fit kit.

Motion Sensor

"AR" Gun Racks

"AR" gun racks are fully adjustable and custom fit in the side shelf area of each "BF" series gun safe. Each rack is designed with enough clearance to accommodate extra large front sights or optics. All racks feature rich pin-dot fabric.



Slide-Out Gun Rack (BF & BFB® Gun Safes Only)

This six-gun rack slides out for easy access to your firearms.



GunSaver Dehumidifier

Will constantly guard your guns against the threat of rust, pitting and moisture damage. Electrical access required.



"Premium" Upgrade Package for HS, BF® and SF Safes

When you choose to upgrade your American Security HS, BF® or SF Series with a "Premium Package", we'll add on some of our most popular options, including the GunSaver Dehumidifier, a Jewelry Tray, a LED light kit, and a power strip. (NOTE: No power strip will be supplied on BF Series safes with integrated internal power outlet).




Features at a Glance

Model	Exterior Dimensions	Gun Capacity	Weight	PDO Included	Bolts	Bolt Diameter	Relocker	
HS SERIES								
RFX703620	76" x 42" x 29¼"	12-14-24-26-38 + 2 Gun 58 + 2 Gun	4,578	No	10	1½"	Yes	
RFX582820	64" x 34" x 29¼"	12-18-30 Gun	3,418	No	10	1½"	Yes	
RF6528	72" x 35" x 29.5"	12-18-30 Gun	3,455	No	10	1½"	Yes	
BF® SERIES								
BF7250	71.25" x 50" x 28"	12-23-24-35-47 + 2 Gun 73 + 2 Gun	1,789	Yes	11	1½"	Yes	
BF7240	71.25" x 40" x 26"	12-14-24-26-38 + 2 Gun 58 + 2 Gun	1,585	Yes	11	1½"	Yes	
BF6636	65.25" x 36" x 26"	12-19-31 + 2 Gun	1,319	Yes	11	1½"	Yes	
BF6030	59.25" x 30" x 26"	11-14-25 + 2 Gun	1036	Yes	11	1½"	Yes	
BF6032	59.25" x 30" x 21"	7-11-18 + 2 Gun	913	Yes	11	1½"	Yes	
BF6024	59.25" x 24" x 21"	8-8-16 Gun + 1 Gun	720	Yes	11	1½"	Yes	
SF SERIES								
SF6036	59" x 36" x 26"	17-17-34 + 2 Gun	850	Yes	14	1½"	Yes	
SF6030	59" x 30" x 26"	14-14-28 + 2 Gun	706	Yes	14	1½"	Yes	
SF6032	59" x 30" x 21"	9-9-18 + 2 Gun	648	Yes	14	1½"	Yes	
SF5924	59" x 24" x 18"	8-8-16 Gun + 1 Gun	514	Yes	14	1½"	Yes	
FV SERIES								
FV7240E5	72" x 40" x 26"	15-15-15-30-45 + 2 Gun	954	Yes	14	1¼"	Yes	
FV6036E5	59" x 36" x 26"	17-17-34 + 2 Gun	724	Yes	14	1¼"	Yes	
FV6030E5	59" x 30" x 26"	15-15-30 + 2 Gun	608	Yes	14	1¼"	Yes	
FV6032E5	59" x 30" x 21"	11-11-22 + 2 Gun	578	Yes	14	1¼"	Yes	
TF SERIES								
TF5924E5	59" x 24" x 18"	8-8-16 Gun + 1 Gun	388	Yes	14	1¼"	Yes	
TF5517E5	55.25" x 17.34" x 16"	11 Gun	286	Yes	8	1"	Yes	
TF5517	55.25" x 17.34" x 16"	11 Gun	286	Yes	8	1"	No	
DEFENSE VAULT								
DV652	6" x 52" x 14"	Tray Size: 3⅜" x 43¼ x 13"	90	Yes	5-Point Slide Locking Bar		No	

Dimensions listed are exterior dimensions. Add 2 3/8" on all BF safes and 2" on all other safes to overall depth for lock and handle.


RF6528 Body / Door

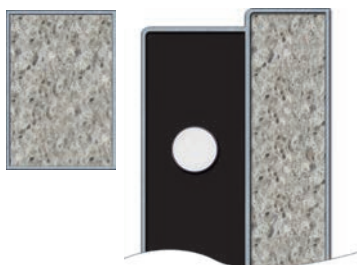

RFX Series Body / Door




BF Series Body / Door




Features at a Glance

	Warranty	U.L. Listing	Thickness Door Overall/ Steel Plate	Body	Fire Rating	Standard Lock	Handle	Standard Interior
	Lifetime	TL30	6"	3½"	120 min / 1850°	Spy-Proof, Key-Locking Dial	5-Spoke	Tan Pin-Dot
	Lifetime	TL30x6	6"	3"	120 min / 1850°	Spy-Proof, Key-Locking Dial	5-Spoke	Tan Pin-Dot
	Lifetime	TL30x6	6"	3"	120 min / 1850°	Spy-Proof, Key-Locking Dial	5-Spoke	Tan Pin-Dot
	Lifetime	RSC	4 ⁵ / ₁₆ " / 3 ³ / ₈ "	2"	120 min / 1200°	Spy-Proof, Key-Locking Dial	5-Spoke	Tan Pin-Dot
	Lifetime	RSC	4 ³ / ₄ " / 1½"	2"	120 min / 1200°	Spy-Proof, Key-Locking Dial	5-Spoke	Tan Pin-Dot
	Lifetime	RSC	4 ³ / ₄ " / 1½"	2"	120 min / 1200°	Spy-Proof, Key-Locking Dial	5-Spoke	Tan Pin-Dot
	Lifetime	RSC	4 ³ / ₄ " / 1½"	2"	120 min / 1200°	Spy-Proof, Key-Locking Dial	5-Spoke	Tan Pin-Dot
	Lifetime	RSC	4 ³ / ₄ " / 1½"	2"	120 min / 1200°	Spy-Proof, Key-Locking Dial	5-Spoke	Tan Pin-Dot
	Lifetime	RSC	4 ³ / ₄ " / 3 ³ / ₈ "	2"	120 min / 1200°	Spy-Proof, Key-Locking Dial	"L" Handle	Tan Pin-Dot
	Lifetime	RSC	4¼" / ¼"	12 ga.	60 min / 1200°	Spy-Proof, Key-Locking Dial	3-Spoke	Gray Velour
	Lifetime	RSC	4¼" / ¼"	12 ga.	60 min / 1200°	Spy-Proof, Key-Locking Dial	3-Spoke	Gray Velour
	Lifetime	RSC	4¼" / ¼"	12 ga.	60 min / 1200°	Spy-Proof, Key-Locking Dial	3-Spoke	Gray Velour
	Lifetime	RSC	4¼" / ¼"	12 ga.	60 min / 1200°	Spy-Proof, Key-Locking Dial	3-Spoke	Gray Velour
	Lifetime	B-Rate	3 ⁵ / ₈ " / 3 ³ / ₁₆ "	11 ga.	45 min / 1200°	ESL5 Electronic Lock	3-Spoke	Gray Fabric
	Lifetime	B-Rate	3 ⁵ / ₈ " / 3 ³ / ₁₆ "	12 ga.	45 min / 1200°	ESL5 Electronic Lock	3-Spoke	Gray Fabric
	Lifetime	B-Rate	3 ⁵ / ₈ " / 3 ³ / ₁₆ "	12 ga.	45 min / 1200°	ESL5 Electronic Lock	3-Spoke	Gray Fabric
	Lifetime	B-Rate	3 ⁵ / ₈ " / 3 ³ / ₁₆ "	12 ga.	45 min / 1200°	ESL5 Electronic Lock	3-Spoke	Gray Fabric
	Lifetime	B-Rate	3 ⁵ / ₈ " / 3 ³ / ₁₆ "	14 ga.	30 min / 1200°	ESL5 Electronic Lock	3-Spoke	Gray Fabric
	1 Year Parts & Labor	B-Rate	3¼" / 3 ³ / ₁₆ "	14 ga.	30 min / 1200°	ESL5 Electronic Lock	"L" Handle	Gray Fabric
	1 Year Parts & Labor	B-Rate	3¼" / 3 ³ / ₁₆ "	14 ga.	30 min / 1200°	Spy-Proof Combination	"L" Handle	Gray Fabric
	1 Year Parts & Labor	B-Rate	1" / 14 ga.	14 ga.	N/A	ESL5 Electronic Lock	N/A	Foam Padding


SF Series Body / Door

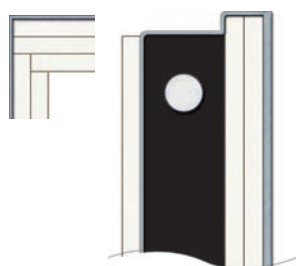

FV Series Body / Door



TF Series Body / Door

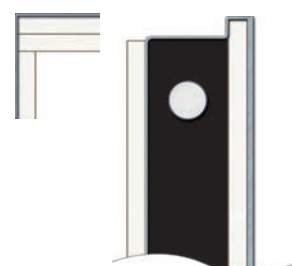

The Industry Leader for Over 65 Years

Since 1948 American Security Products has protected the assets of our clients throughout the world by providing a broad array of safes and consulting services with the highest degree of quality, integrity and responsiveness. Customers have trusted AMSEC safes for generations. The design of each AMSEC safe draws on over 65 years of experience on protecting the physical assets of our customers. There aren't many criminals with over 65 years of experience, so we think that gives us the advantage.

Before the American Security name is attached, each safe must undergo a rigid 28-point inspection. In addition, every AMSEC safe undergoes the industry's most comprehensive testing program. AMSEC uses independent agencies such as Underwriter's Laboratories to put our designs to the test. We maintain the tightest tolerances and highest standards of fit and finish in the industry.

Our commitment doesn't end there. We have built our company on the commitment to offer the best service in the industry which will insure that AMSEC remains the industry leader.

Our corporate center is staffed with highly trained Customer Service Representatives and our Service Department is supported by 7,500 factory-trained technicians throughout the world. Technicians are available 24 hours a day, 365 days a year to answer questions and help solve problems with any safe shipped anywhere in the world. We have been providing safes and security solutions to the banking industry since 1948. This type of high security technology is built right into our gun safes.

We produce over 60,000 safes each year and we take protecting our customers' assets very seriously. That's how we got to be the largest security safe manufacturer in the world, and that's why you can't buy a better gun safe than an American Security safe.

Simply put, our reputation is built on product design, innovative technology and the best support in the industry.

It has worked for us for over 65 years and it ensures our complete customer satisfaction. The choice is easy:

American Security Products Co.

11925 Pacific Avenue, Fontana, CA 92337

951-685-9680

www.amsecusa.com

AMSEC reserves the right to update products as necessary. AMSEC is not responsible for typographical errors.

Part #4305172 14v1

Revised 01/14

